RT9420

0-90° to 0-50 Turns • 0..20mA • 4..20mA

Industrial Grade Rotational Position Sensor Absolute Rotary Position up to 50 turns Aluminum or Stainless Steel Enclosure Options IP68 / NEMA 6 • Hazardous Area Certification







GENERAL

Full Stroke Range Options	0-0.25 to 0-50 turns					
Output Signal Options	420 mA (2-wire) and 020 mA (3-wi					
Accuracy	see ordering information					
Repeatability	± 0.05% full stroke					
Resolution	essentially infinite					
Enclosure Material Options	powder-painted aluminum or stainless steel					
Sensor	plastic-hybrid precision potentiometer					
Potentiometer Cycle Life	see ordering information					
Shaft Loading	up to 35 lbs. radial and 5 lbs. axial					
Weight, Aluminum (Stainles	s Steel) Enclosure 5 lbs. (10 lbs.) max					

ELECTRICAL

Input Voltage		see ordering information				
Input Current		20 mA max.				
Maximum Loop Resitar	ice (Load)	(loop supply voltage - 8)/0.020				
Circuit Protection		38 mA max.				
Impedence		100M ohms@100 VDC, min.				
Output Signal Adjustme	ent					
Zero Adjustment	from factory	set zero to 50% of full stroke range				
Span Adjustment		to 50% of factory set span				
Thermal Effects, Zero		0.01% f.s./°F, max.				
Thermal Effects, Span		0.01% f.s./°F, max.				

EMC COMPLIENCE PER DIRECTIVE 89/336/EEC

Emission/Immunity EN50081-2/EN50082-2

ENVIRONMENTAL


Enclosure NEMA 4/4X/6, IP 67/68

-40° to 200°F (-40° to 90°C) **Operating Temperature** otional 3-wire, 0...20mA output signal available.

up to 10 g to 2000 Hz maximum Vibration






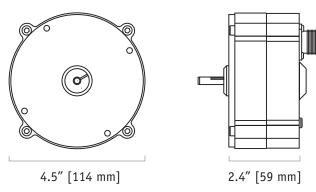

The RT9420 provides rotational position feedback via 4...20 mA current loop signal. This device combines the superb linearity and resolution of a plastic-hybrid potentiometer and the durability of Celesco's 4...20mA circuit to provide an accurate and reliable electrical signal. Additionally the zero and span settings are adjustable through access holes in the housing.


This innovative sensor from Celesco, designed to meet NEMA-4 and IP67 standards, is available in full stroke ranges of 1/4 to 50 turns.

Output Signal:



celesco celesco.com • info@celesco.com

Outline Drawing:

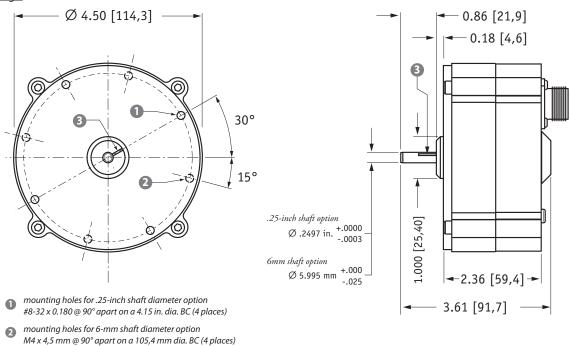

Ordering Information:

reference mark





full counter-clockwise position - align mark on shaft to mark

on face for start of measurement range

Sample Model Number:

tolerances are ± 0.02 in. [± 0.5 mm] unless otherwise noted

RT9420 - 0005 - 111 - 1110

DIMENSIONS ARE IN INCHES [MM]

5 turns (clockwise shaft rotations)

B shaft diameter:

aluminum .25 inches

Output signal: electrical connection: 4...20 mA signal increasing clockwise

6-pin plastic connector

Full Stroke Ranae:


® order code:	R125	0R25	0R50	0001	0002	0003	0005	0010	0020	0030	0050
clockwise shaft rotations, min:	0.125	0.25	0.50	1	2	3	5	10	20	30	50
accuracy (% of f.s.):	0.3%	0.3%	0.3%	0.3%	0.3%	0.3%	0.2%	0.15%	0.15%	0.15%	0.15%
potentiometer cycle life*:	2.5×10^6	2.5 x 10 ⁶	5 x 10 ⁵	2.5 x 10 ⁵	2.5 x 10 ⁵	2.5×10^{5}	2.5×10^5				

^{*–}number of times the sensor shaft can be cycled back and forth from beginning to end and back to the beginning before any measurable signal degradation may occur.

Enclosure Material:

♠ order code. powder-painted aluminum 303 stainless steel

Shaft Diameter:






tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799


Ordering Information (cont.):

Output Signals:

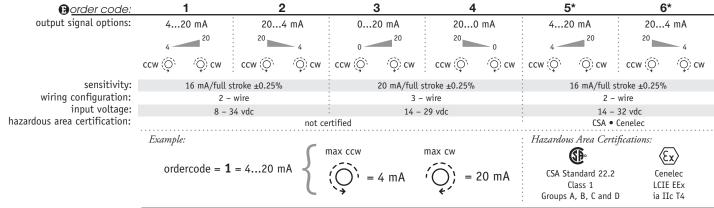

*IMPORTANT: intrinsically safe when powered from a CSA certified zener barrier rated 28 VDC max, 110 mA max per installation drawing#677984



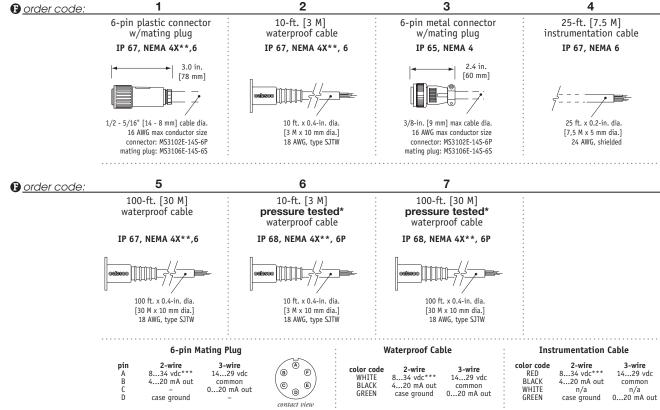



-Test pressure: 100 feet [30 meters] H2O (40 PSID); Test Medium: Air; Duration: 2 hours. -NEMA 4X applies to stainless steel enclosure only.

-14-32 VDC for hazardous area option.

Output Signal Selection:

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.

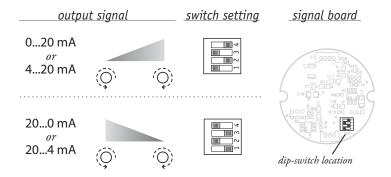

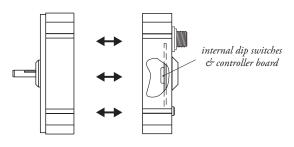

To gain access to the signal board, remove four Allen-Head Screws and seperate the two case halves.



version: 7.0 last updated: March 1, 2014

celesco.com • info@celesco.com