

# PT9301 (Extended Range)

## Extended Ranges • Position/Velocity Output

Linear Position/Velocity to 1700 inches (4300 cm)

Stroke Range Options: 0-600 to 0-1700 inches

VLS Option To Prevent Free-Release Damage

IP68 • NEMA 6 Protection

### GENERAL

Full Stroke Range Options (on this datasheet)	0-600 to 0-1700 inches
Measuring Cable Options	stainless steel or thermoplastic
Enclosure Material	powder-painted aluminum
Sensor, Position	plastic-hybrid precision potentiometer
Sensor, Velocity	DC tach generator
Maximum Retraction Acceleration	see ordering information
Maximum Velocity	see ordering information
Weight, Aluminum (Stainless Steel) Enclosure	14 lbs. (28 lbs.) max.

### POSITION


Output Signal	voltage divider (potentiometer)
Accuracy	± 0.10% full stroke
Repeatability	± 0.02% full stroke
Resolution	essentially infinite
Sensor, Position	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	≥250,000
Input Resistance Options	500, 1K, 5K or 10K Ω (see ordering information)
Power Rating, Watts	2.0 at 70°F derated to 0 at 250°F
Recommended Maximum Input Voltage	30V (AC/DC)
Output Signal Change Over Full Stroke Range	94% ±4% of input voltage

### VELOCITY

Output Signal	DC tachometer output
Linearity	better than ±0.10% of output at any velocity
Repeatability	±0.10% of reading
Sensor	tach generator
Input Voltage	none required
Output Voltage @ 100 inches per minute	361 mV ±3%
Output Impedance	350 ohms ±10%
Output Ripple (for velocity ≥ 1.29 inches per second)	±3% rms

### ENVIRONMENTAL


Enclosure	NEMA 4/4X/6, IP 67/68
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum

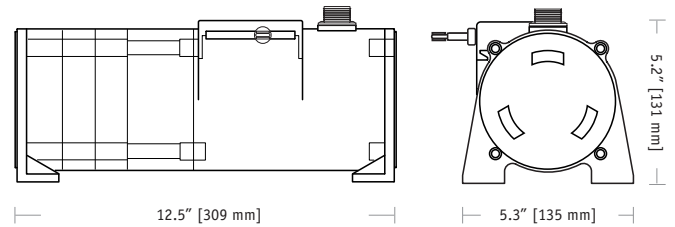

The PT9301 is a combination position and velocity transducer for demanding long-range applications requiring a linear position measurements in ranges up to 1700". A precision plastic-hybrid potentiometer provides accurate position feedback while a self-generating DC tachometer provides a velocity signal that is proportional to the speed of the traveling stainless-steel measuring cable.


As a member of Celesco's innovative family of NEMA-4 rated cable-extension transducers, the PT9301 offers numerous benefits. It installs in minutes, functions properly without perfectly parallel alignment, and when its cable is retracted, it measures only 6".

### Output Signal:

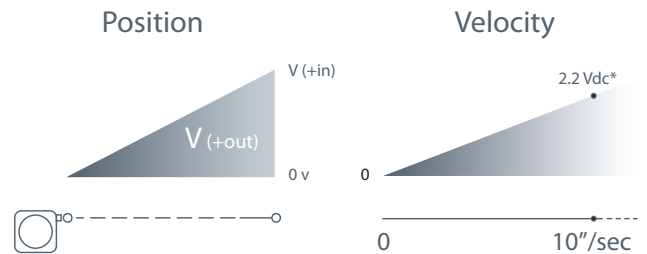


\*velocity output rate = 361 mV ± 3% @ 100 inches per min.


Outline Drawing

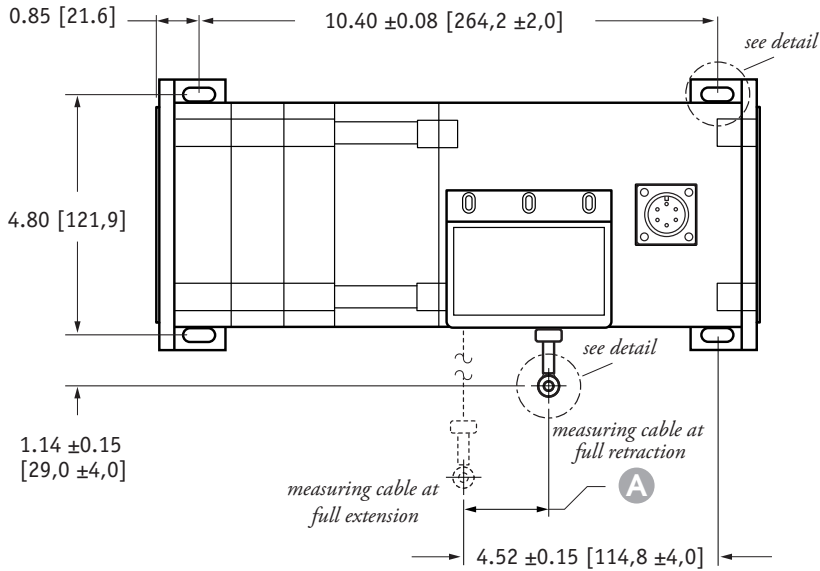

**mounting hole detail**





**eyelet detail**

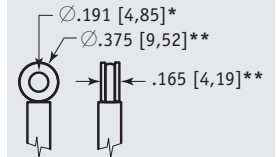

**A DIMENSION**

RANGE	inches [mm]
600	1.76 [44,7]
800	1.58 [40,1]
1000	1.98 [50,2]
1200	1.98 [50,2]
1500	1.86 [47,2]
1700	2.11 [53,6]

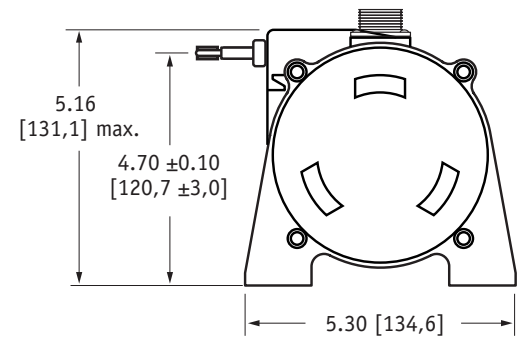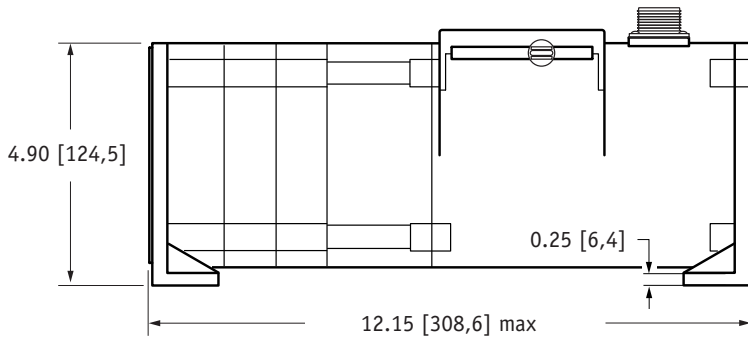

DIMENSIONS ARE IN INCHES [MM]  
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance = +.005 -.001 [+.13 -.03]  
\*\* tolerance = +.005 -.005 [+.13 -.13]

Ordering Information:

**Model Number:**

**PT9301-** \_\_\_\_\_ **- 1** \_\_\_\_\_ **- 1** \_\_\_\_\_ **0**  
*order code:*                      **R**    **A**    **B**    **C**    **D**    **E**    **F**    **G**

Sample Model Number:

**PT9301 - 1200 - 111 - 1110**

- R** range: 1200 inches
- B** measuring cable: nylon-coated stainless
- C** cable exit: front
- D** output signal: 500 ohm position / DC tachoi
- F** electrical connection: 6-pin plastic connector

**Full Stroke Range:**

<b>R</b> <i>order code:</i>	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
full stroke range, min:	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
cable tension (±35%):	27 oz.	24 oz.	20 oz.	19 oz.	18 oz.	17 oz.

Ordering Information (cont.):

**Measuring Cable:**

<b>① order code:</b>	<b>1</b>	<b>2</b>
cable construction:	nylon-coated stainless steel rope*	bare stainless steel rope*
general use:	indoor	outdoor, debris, high temperature

*cable diameter:	stroke range:	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
	nylon-coated stainless:	.034 in.	.019 in.	.019 in.	.019 in.	.014 in.	.014 in.
	bare stainless:	.031 in.	.018 in.	.018 in.	.018 in.	.015 in.	.015 in.

**Cable Exit:**

<b>① order code:</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
	front	top	back	down

**Output Signals:**

<b>① order code:</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
position sensing potentiometer:	500 ohms*	1000 ohms*	5000 ohms*	10,000 ohms*
<b>position sensing circuit</b>			<b>velocity sensing circuit</b>	

\*-tolerance = ±10%

**Electrical Connection:**

<b>① order code:</b>	<b>1</b>	<b>3</b>	<b>4</b>																																	
	6-pin plastic connector with mating plug <b>IP 67, NEMA 4X*, 6</b>	6-pin metal connector with mating plug <b>IP 65, NEMA 4</b>	25-ft. instrumentation cable 24 AWG, shielded <b>IP 67, NEMA 6</b>																																	
	1/2 - 5/16" [14 - 8 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	3/8-in. [9 mm] max cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	25 ft. x 0.2-in. dia. [7.5 M x 5 mm dia.] 24 AWG, shielded																																	
	<b>6-pin mating plug:</b> <table border="0"> <tr> <td>pin</td> <td>signal</td> <td rowspan="2">} position</td> </tr> <tr> <td>A</td> <td>+ in</td> </tr> <tr> <td>B</td> <td>common</td> <td rowspan="2">} velocity</td> </tr> <tr> <td>C</td> <td>+ out</td> </tr> <tr> <td>D</td> <td>-</td> <td rowspan="2">} velocity</td> </tr> <tr> <td>E</td> <td>+ out</td> </tr> <tr> <td>F</td> <td>- out</td> <td></td> </tr> </table>		pin	signal	} position	A	+ in	B	common	} velocity	C	+ out	D	-	} velocity	E	+ out	F	- out		<b>25-ft. instrumentation cable:</b> <table border="0"> <tr> <td>color</td> <td>signal</td> <td rowspan="2">} position</td> </tr> <tr> <td>red</td> <td>+ in</td> </tr> <tr> <td>black</td> <td>common</td> <td rowspan="2">} velocity</td> </tr> <tr> <td>green</td> <td>+ out</td> </tr> <tr> <td>white</td> <td>+ out</td> <td rowspan="2">} velocity</td> </tr> <tr> <td>brown</td> <td>- out</td> </tr> </table>	color	signal	} position	red	+ in	black	common	} velocity	green	+ out	white	+ out	} velocity	brown	- out
pin	signal	} position																																		
A	+ in																																			
B	common	} velocity																																		
C	+ out																																			
D	-	} velocity																																		
E	+ out																																			
F	- out																																			
color	signal	} position																																		
red	+ in																																			
black	common	} velocity																																		
green	+ out																																			
white	+ out	} velocity																																		
brown	- out																																			

\*-applies to stainless steel enclosure only

version: **9.0** last updated: **February 24, 2016**