

Inclinometer

4...20 mA Output • Hazardous Area Certification

Ranges: 0-45° to 0-240°

Industrial Grade



IT9420


Specification Summary:

GENERAL
 Available Full Stroke Ranges 0-45 to 0-240 degrees
 Weight (aluminum enclosure)..... 5 lb. typical (aluminum enclosure)
 Enclosure Material.....aluminum (stainless steel available)
 Sensor precision potentiometer
 Electrical Connector..... MS3102E-14S-6P
 Mating Plug (included) MS3106E-14S-6S

ELECTRICAL
 Output Signal 4...20 mA
 Input Voltage see ordering information
 Input Current..... 20 mA max.
 Circuit Protection.....38 mA maximum

PERFORMANCE
 Sensitivity.....16 mA/full stroke, ± 0.25%
 Accuracy*..... ± 1% full stroke
 Accuracy Option 0.5% full stroke—*please contact factory*
 Resolutionessentially infinite
 Output Signal Adjustment for Full Stroke Ranges of 45° - 105°:
 Zero Adjustment from factory set zero to 20% of full stroke range
 Span Adjustment.....to 20% of factory set span
 Output Signal Adjustment for Full Stroke Ranges of 120° - 240°:
 Zero Adjustment from factory set zero to 40% of full stroke range
 Span Adjustment.....to 40% of factory set span
 *—when plane of pendulum motion parallel to plane of rotation within ± 3°


ENVIRONMENTAL
 EnclosureNEMA 4/4X/6, IP 67/68
 Hazardous Area Certificationsee ordering information
 Operating Temperature-30° to 200°F (-34° to 90°C)
 Vibration..... up to 10 G's to 2000 Hz maximum

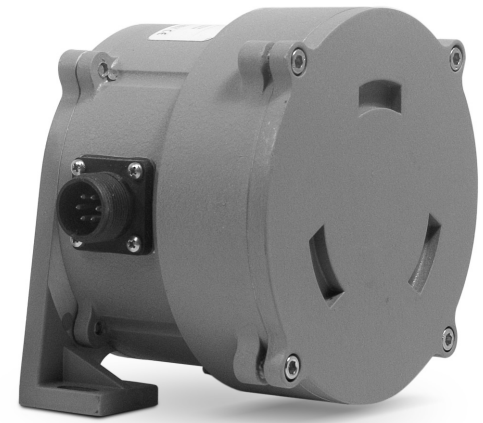


The model IT9420 is a rugged yet simple device which provides a 4 to 20 mA current feedback signal for incline position. The heart of the IT9420 is a magnetically-damped pendulum coupled to a conductive plastic precision potentiometer. A highly linear relationship between inclination and a 4 to 20 mA output is maintained over the full range of the IT9420.

The IT9420 is easy to use: simply attach it to the object of measurement and install two wires for the current loop.

Outline Drawing

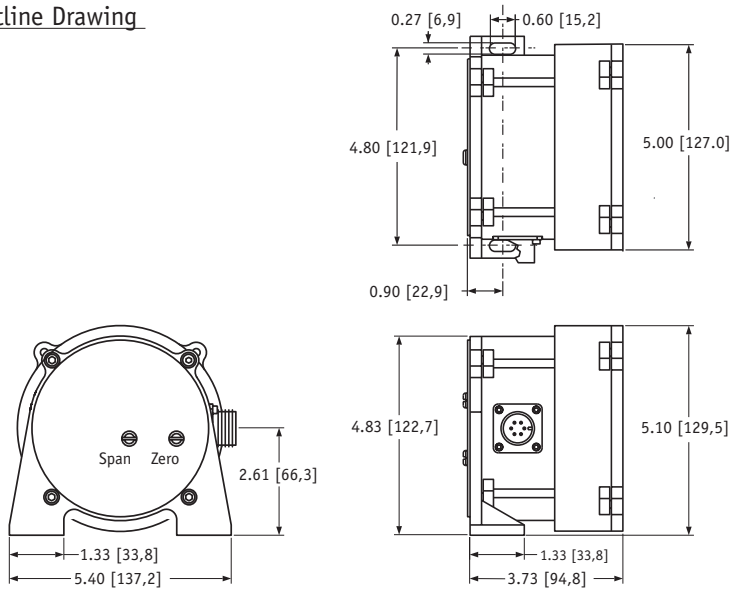

Output Signal

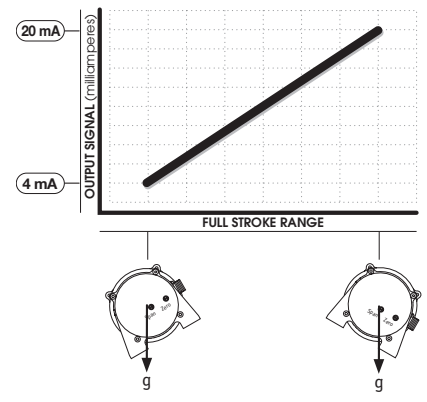

DIMENSIONS ARE IN INCHES [MM] tolerances are ±0.02 in. [±0.5 mm] unless otherwise specified
 Celesco Transducer Products, Inc.
 20630 Plummer Street • Chatsworth, CA 91311
 tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799

celesco
 celesco.com • info@celesco.com

Ordering Information:

Model Number:


IT9420 - _____ - _____ - _____ - _____ - _____
 order code: CW CCW A B C D

Sample Model Number:
IT9420 - 060 - 120 - 1110

- CW clockwise rotation: 60°
- CCW counter-clockwise rotation: 120° } total rotation = 180°
- A enclosure: aluminum
- B output signal: 4 mA @ 120° CCW
20 mA @ 60° CW
- C electrical connection: 6-pin plastic connector
- D magnetic dampening: yes

Full Clockwise Rotation:


CW	order code:	000	015	030	045	060	075	090	105	120
		0°	15°	30°	45°	60°	75°	90°	105°	120°



Important--
 the sum of the Clockwise and Counter-Clockwise Rotations must be in the range of 45° to 240°

Full Counter-Clockwise Rotation:

CCW	order code:	000	015	030	045	060	075	090	105	120
		0°	15°	30°	45°	60°	75°	90°	105°	120°

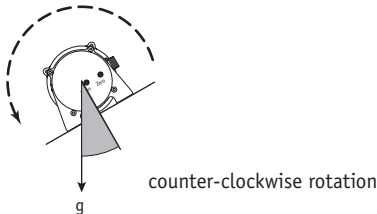

Important--
 the sum of the Clockwise and Counter-Clockwise Rotations must be in the range of 45° to 240°

Enclosure Material:

A	order code:	1	2
		powder-painted aluminum	303 stainless steel

Output Signal:

B	order code:	1	2	5	6
output signal options:		4...20 mA	20...4 mA	4...20 mA	20...4 mA
input voltage:		8 - 34 vdc		14 - 32 vdc	

hazardous area certification: not certified

CSA Standard 22.2
 Class 1
 Groups A, B, C and D

Cenelec
 LCIE EEx
 ia IIC T4


***IMPORTANT:** intrinsically safe when powered from a CSA certified zener barrier rated 28 VDC max, 110 mA max per installation drawing#677984

Ordering Information:

Electrical Connection:

Ⓢ order code:


1
6-pin plastic connector w/mating plug
IP 67, NEMA 4X , 6**



3.0 in. [78 mm]


1/2 - 5/16" [14 - 8 mm] cable dia.
16 AWG max conductor size
connector: MS3102E-14S-6P
mating plug: MS3106E-14S-6S

2
10-ft. [3 M] waterproof cable
IP 67, NEMA 4X , 6**



10 ft. x 0.4-in. dia. [3 M x 10 mm dia.]
18 AWG, type SJTW


4
25-ft. [7.5 M] instrumentation cable
IP 67, NEMA 6



25 ft. x 0.2-in. dia. [7,5 M x 5 mm dia.]
24 AWG, shielded


Ⓢ order code:

5
100-ft. [30 M] waterproof cable
IP 67, NEMA 4X , 6**




100 ft. x 0.4-in. dia. [30 M x 10 mm dia.]
18 AWG, type SJTW

6
10-ft. [3 M] **pressure tested*** waterproof cable
IP 68, NEMA 4X , 6P**



10 ft. x 0.4-in. dia. [3 M x 10 mm dia.]
18 AWG, type SJTW


7
100-ft. [30 M] **pressure tested*** waterproof cable
IP 68, NEMA 4X , 6P**



100 ft. x 0.4-in. dia. [30 M x 10 mm dia.]
18 AWG, type SJTW

6-pin Mating Plug

pin	signal
A	8...34 vdc
B	4...20 mA out
C	-
D	case ground



Waterproof Cable

color code	signal
WHITE	8...34 vdc
BLACK	4...20 mA out
GREEN	case ground

Instrumentation Cable

color code	2-wire
RED	8...34 vdc
BLACK	4...20 mA out
WHITE	n/a
GREEN	case ground

*-Test pressure: 100 feet [30 meters] H₂O (40 PSID) Test Medium: Air; Duration: 2 hours. ** -applies to stainless steel enclosure only.

Dampening Option:

Ⓢ order code:




0
with magnetic dampening

1
without magnetic dampening


Output Signal Selection:

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trim pots will be required to precisely match the 4 mA and 20mA signal values to the beginning and end points of the stroke.

To gain access to the signal board, remove four Allen-Head Screws and remove end cover bracket.



internal dip switches & signal board



version: 4.0 last updated: May 21, 2013

